

An Early Characterisation of Wearing Variability on Motion Signals for Wearables

Chulhong Min

Nokia Bell Labs, Cambridge, UK
chulhong.min@nokia-bell-labs.com

Alessandro Montanari

Nokia Bell Labs, Cambridge, UK
alessandro.montanari@nokia-bell-labs.com

Akhil Mathur

Nokia Bell Labs and University College London, UK
akhil.mathur@nokia-bell-labs.com

Fahim Kawsar

Nokia Bell Labs, Cambridge, UK and TU Delft, Netherlands
fahim.kawsar@nokia-bell-labs.com

ABSTRACT

We explore a new variability observed in motion signals acquired from modern wearables. *Wearing variability* refers to the variations of the device orientation and placement across wearing events. We collect the accelerometer data on a smartwatch and an earbud and analyse how motion signals change due to the wearing variability. Our analysis shows that the wearing variability can bring an unexpected change to motion signals, not only from different users but also from different wearing sessions of the same user. We also provide empirical ranges of changes in device orientations.

CCS CONCEPTS

• **Human-centered computing** → **Empirical studies in ubiquitous and mobile computing.**

KEYWORDS

wearable, motion sensing, wearing variability

ACM Reference Format:

Chulhong Min, Akhil Mathur, Alessandro Montanari, and Fahim Kawsar. 2019. An Early Characterisation of Wearing Variability on Motion Signals for Wearables. In *Proceedings of the 2019 International Symposium on Wearable Computers (ISWC '19), September 9–13, 2019, London, United Kingdom*. ACM, New York, NY, USA, 3 pages. <https://doi.org/10.1145/3341163.3347716>

1 INTRODUCTION

Motion sensing on wearables opens up interesting possibilities of monitoring various types of everyday gestures by

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for third-party components of this work must be honored. For all other uses, contact the owner/author(s).

ISWC '19, September 9–13, 2019, London, United Kingdom

© 2019 Copyright held by the owner/author(s).

ACM ISBN 978-1-4503-6870-4/19/09.

<https://doi.org/10.1145/3341163.3347716>



Figure 1: Example of wearing variability of an earbud

virtue of their fixed placement. Since they are mostly designed to be worn on a specific part of the body, e.g., a smartwatch on the wrist and a smart earbud on the ear, motion sensing on wearables can leverage the absolute orientation of the devices to monitor the fine-grained movement of a body part. For instance, a smartwatch can detect hand gestures including finger writing [12] and smoking events [6]. Dietary activities can be monitored by detecting the movement of an arm [7] and a jaw [1]. Even facial expressions such as laughing and frowning can be captured by monitoring the movement of facial muscles on an earbud [5].

While wearables guarantee the relatively fixed placement, it is still challenging to directly use raw motion signals due to a number of variability factors such as hardware variability (sampling rate heterogeneity and instability) [8] and user variability (different gesture patterns across users) [4].

We introduce a new variability factor, *wearing variability*, which refers to the variations of the device orientation and placement across wearing events. Since the device orientation affects the raw acceleration signals, it is obvious that different orientations can degrade the recognition accuracy, especially when relying on the absolute orientation of devices. It can be easily expected that different users have different wearing habits causing wearing variability. However, even for the same user, devices can be worn in different ways when the user newly wears the devices. Figure 1 shows an example (wearing an earbud from the same user); the earbud in the right figure is less tilted than that in the left figure.

While wearing variability is expected, there has been no quantification of it in the literature. Several attempts have been made for motion sensing invariant to sensor orientation [2, 9], but mostly leveraged the magnitude of the acceleration vector and targeted the physical activity recognition.

Ustev et al. proposed an approach [11] to transform the acquired data from the sensor coordinate frame to the Earth’s coordinate frame, but it requires continuous monitoring of accelerometer, gyroscope, and magnetometer, and more importantly, additional processing-heavy computation to reflect a user’s facing direction. We argue that this problem demands a more principled, data-driven solution approach. We present the first ever study quantifying the wearing variability in the context of ear-worn and wrist-worn devices.

2 DATA-DRIVEN STUDY: WEARING VARIABILITY

We used two types of wearables, an earbud (eSense [3]) and a smartwatch (LG Watch Urbane 2nd version). We chose them because they 1) have commercial form factors and 2) provide open APIs to access raw sensor data. The sampling rate of an earbud and a smartwatch was set to 30 Hz and 100 Hz (FASTEST), respectively.

We collected the accelerometer data from 20 participants (16 males and 4 females) with 5 sessions. On each session, the participants were asked to naturally wear the devices as they usually do. We further asked them to stand still and put their arms perpendicularly to the ground during the collection (30 seconds). Then, they took off the devices and repeated the sessions. Note that variability of user behaviour is not the focus of this paper and thus we did not consider the situations where the participants walk or make gestures.

Looking into Motion Signals

Objective: We investigate the similarity of motion signals on different wearing events, i.e., how similar (or different) motion signals are across wearing events and users.

Setup: We segment the data streams into 3-second-long segments and measure the distance of two segments in three different ways, *intra-wearing*, *inter-wearing*, and *inter-user*. The *intra-wearing* takes two segments that belong to the same session of the participant, i.e., 4500 pairs ($20 \text{ participants} \times 5 \text{ sessions} \times 10 \text{ segments} C_2$). It is used as a baseline to show the stability of signals in a single session while a user is wearing the devices. The *inter-wearing* takes two segments that belong to different wearing sessions of the same participant, i.e., 20000 pairs ($20 \text{ participants} \times 5 \text{ sessions} C_2 \times 10^2 \text{ segments}$). It shows how signals become different when a user newly wears the devices. The *inter-user* takes two segments that belong to different participants, i.e., 475000 pairs ($20 \text{ participants} C_2 \times 50^2 \text{ segments}$). It shows how signals are different across different users; note that wearing variability also includes the cases from different users. For the distance measurement, we calculated the average Euclidean distance over the pairs of sensor readings in two segments.

Results: Figure 2 shows the boxplots of the average distances for intra-wearing, inter-wearing, and inter-user; higher

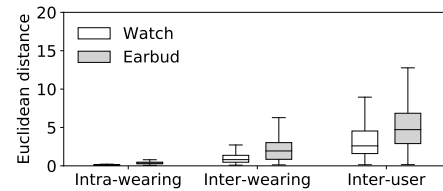


Figure 2: Euclidean distances on wearing variability

distance means more different signal pattern. The results show three important implications. First, wearing variability brings a non-trivial impact on making signals look different. For example, the average distance of earbud signals is 0.38 within a wearing session (*intra-wearing*), 2.1 across different wearing sessions of the same participant (*inter-wearing*), and 5.1 across different users (*inter-user*). Second, the impact of wearing variability is different depending on the type of devices. While the smartwatch shows a similar pattern to the earbud, its distance increases less than the earbud. The average distance of a smartwatch is 0.12, 1.01, and 3.2 for *intra-wearing*, *inter-wearing*, and *inter-user*, respectively. This was mainly because the form factor of an earbud brings more freedom of tilting as shown in Figure 1 and the amount of tilting changes even slightly every time the participant wore the earbud. On the other hand, the position of a smartwatch was relatively more fixed. Last, as expected, the distance of *intra-wearing* is very low on both devices; the variation of earbud signals was mainly due to the subtle movement of the head during the data collection.

Looking into Device Orientation

Objective: To better understand the meaning of the distance of acceleration signals, we further analyse the device orientation, i.e., how much the device orientation changes every time a user wears the devices.

Setup: As for the orientation information, we used pitch (rotation around the side-to-side axis) and roll (rotation around the front-to-back axis) from accelerometer readings; we did not include yaw (rotation around the vertical axis) as it cannot be measured by an accelerometer and is mainly affected by the orientation of the main body. We measured the average pitch and raw on every 3-second-long segments and computed their absolute difference between two segments.

Results: Figure 3a and 3b show the boxplots of the angular differences of the earbud and smartwatch, respectively. The results show empirical values on how much the device orientation changes due to wearing variability. For the earbud, the average difference of pitch and raw is 0.88 and 0.90 degrees for *intra-wearing*, meaning that the earbud hardly moved during the single session. On *inter-wearing*, surprisingly, the difference in pitch and raw becomes 7.87 and 9.78

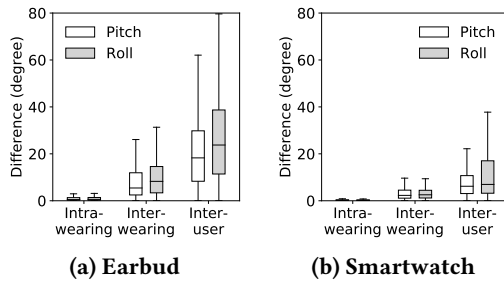


Figure 3: Difference of pitch and roll

degrees, respectively. The difference becomes larger on inter-user, 20.41 and 26.32 degrees. It implies that the accuracy of sensing models can be significantly dropped when they are tested on an unseen user, and more importantly, even for the same user in different wearing events.

The smartwatch shows a similar pattern, but the difference is relatively lower. For intra-wearing, the average difference of pitch and roll is 0.28 and 0.26 degrees, respectively. The average difference becomes 3.32 and 3.24 degrees for inter-wearing, and 7.36 and 7.87 degrees for inter-user.

3 CONCLUSION AND FUTURE WORK

In this paper, we systematically explored a new variability factor, *wearing variability* that needs to be taken into account for motion sensing on wearables. Our study shows that wearing variability brings an unexpected change of motion signals (compared to the reference signals used in the training), not only from different users but also the same user in different wearing events. One may argue that the impact of wearing variability looks marginal as it causes the difference of roll and pitch less than around 10-20 degrees. However, when motion signals on wearables are used to detect fine-grained movements of a body part with raw signals, a small difference of the device orientation can cause the significant degradation of the performance as the error accumulates while tracking. Also, note that the reported number in the previous sections is the average one. Considering the range, e.g., between the first and third quartiles, the actual impact of wearing variability could increase much more.

Our study motivates two complementary approaches that can address wearing variability for motion sensing. First, we can leverage the data augmentation technique, e.g., [10], to generate diverse device orientations in the training dataset without further collecting the data. Our study can be used to extract a reasonable range of parameter values to cover realistic situations. Second, we can calibrate runtime acceleration data when the system detects the new wearing events. For example, the system can identify 1-second-long data when a user stands still without any movement, calculate the angular difference from the reference orientation, and rotate the runtime acceleration data, e.g., [13]. We leave them as future work.

REFERENCES

- [1] Abdelkareem Bedri, Richard Li, Malcolm Haynes, Raj Prateek Kosaraju, Ishaan Grover, Temiloluwa Prioleau, Min Yan Beh, Mayank Goel, Thad Starner, and Gregory Abowd. 2017. EarBit: using wearable sensors to detect eating episodes in unconstrained environments. *Proceedings of the ACM on interactive, mobile, wearable and ubiquitous technologies* 1, 3 (2017), 37.
- [2] Taeho Hur, Jaehun Bang, Dohyeong Kim, Oresti Banos, and Sungyong Lee. 2017. Smartphone location-independent physical activity recognition based on transportation natural vibration analysis. *Sensors* 17, 4 (2017), 931.
- [3] Fahim Kawsar, Chulhong Min, Akhil Mathur, and Alessandro Montanari. 2018. Earables for Personal-Scale Behavior Analytics. *IEEE Pervasive Computing* 17, 3 (2018), 83–89.
- [4] Matthias Kreil, Bernhard Sick, and Paul Lukowicz. 2014. Dealing with human variability in motion based, wearable activity recognition. In *2014 IEEE International Conference on Pervasive Computing and Communication Workshops (PERCOM WORKSHOPS)*. IEEE, 36–40.
- [5] Seungchul Lee, Chulhong Min, Alessandro Montanari, Akhil Mathur, Youngjae Chang, Junehwa Song, and Fahim Kawsar. 2019. Automatic Smile and Frown Recognition with Kinetic Earables. In *Proceedings of the 10th Augmented Human International Conference 2019*. ACM, 25.
- [6] Nazir Saleheen, Amin Ahsan Ali, Syed Monowar Hossain, Hillol Sarker, Soujanya Chatterjee, Benjamin Marlin, Emre Ertin, Mustafa Al'Absi, and Santosh Kumar. 2015. puffMarker: a multi-sensor approach for pinpointing the timing of first lapse in smoking cessation. In *Proceedings of the 2015 ACM International Joint Conference on Pervasive and Ubiquitous Computing*. ACM, 999–1010.
- [7] Giovanni Schiboni and Oliver Amft. 2018. Sparse natural gesture spotting in free living to monitor drinking with wrist-worn inertial sensors. In *Proceedings of the 2018 ACM International Symposium on Wearable Computers*. ACM, 140–147.
- [8] Allan Stisen, Henrik Blunck, Sourav Bhattacharya, Thor Siiger Prentow, Mikkel Baun Kjærsgaard, Anind Dey, Tobias Sonne, and Mads Møller Jensen. 2015. Smart devices are different: Assessing and mitigating mobile sensing heterogeneities for activity recognition. In *Proceedings of the 13th ACM Conference on Embedded Networked Sensor Systems*. ACM, 127–140.
- [9] Lin Sun, Daqing Zhang, Bin Li, Bin Guo, and Shijian Li. 2010. Activity recognition on an accelerometer embedded mobile phone with varying positions and orientations. In *International Conference on Ubiquitous Intelligence and Computing*. Springer, 548–562.
- [10] Terry Taewoong Um, Franz Michael Josef Pfister, Daniel Pichler, Satoshi Endo, Muriel Lang, Sandra Hirche, Urban Fietzek, and Dana Kulić. 2017. Data augmentation of wearable sensor data for Parkinson's disease monitoring using convolutional neural networks. *arXiv preprint arXiv:1706.00527* (2017).
- [11] Yunus Emre Ustev, Ozlem Durmaz Incel, and Cem Ersoy. 2013. User, device and orientation independent human activity recognition on mobile phones: Challenges and a proposal. In *Proceedings of the 2013 ACM conference on Pervasive and ubiquitous computing adjunct publication*. ACM, 1427–1436.
- [12] Chao Xu, Parth H Pathak, and Prasant Mohapatra. 2015. Finger-writing with smartwatch: A case for finger and hand gesture recognition using smartwatch. In *Proceedings of the 16th International Workshop on Mobile Computing Systems and Applications*. ACM, 9–14.
- [13] Aras Yurtman and Billur Barshan. 2017. Activity recognition invariant to sensor orientation with wearable motion sensors. *Sensors* 17, 8 (2017), 1838.